



SPECIFICATION SHEET · PET-180

180 TON PET INJECTION MOULDING MACHINE

Mould clamping force 165 / 180 Tons, two screw options from 40 to 45 mm, max. shot weight 249 to 315 gms (PS).

165 / 180 Tons
MOULD CLAMPING
FORCE

249 to 315 gms
MAX. SHOT WEIGHT (PS)

40 / 45 mm
SCREW DIAMETER
OPTIONS

**460 X 421 / 480 X
424 mm**
SPACE BETN. TIE BARS
H X V

900 mm
MAX. DAY LIGHT
OPENING


31.8 KW
TOTAL CONNECTED
LOAD

TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION	UNIT	SCREW A	SCREW B
INJECTION UNIT			
Screw Diameter	mm	40	45
Screw L/D Ratio		20:1	18:1
Max. Swept Volume	Cub.cm	276	350
Max. Shot Weight (PS)	gms	249	315
Max. Injection Pressure	Kg/cm ²	2250	1778
Rate Of Injection	cc/sec	111	140
Screw Speed	rpm	300	300
Nozzle Force	Tons	4.7	4.7
LOCKING UNIT			
Mould Clamping Force	Tons	165 / 180	
Mould Clamping Stroke	mm	375	
Mould Thickness - Min - Max.	mm	200 - 525	
Max. Day Light Opening	mm	900	
Space Betn. Tie Bars - H X V	mm	460 X 421 / 480 X 424	
Platen Size	mm	705 X 650 / 725 X 650	
HYDRAULIC EJECTOR			
Ejector Stroke	mm	110	
Ejector Force	Tons	7.5	
GENERAL			
Servo Motor	KW	19.3	
Heating Capacity	KW	12.5	
Total Connected Load	KW	31.8	
Tank Capacity	Ltrs	410	
Machine Weight	Tons	5.6	
Floor Space (L X W X H)	Mtr.	4.9 X 1.5 X 2	

Screw A and Screw B are alternative injection unit configurations. Locking unit, ejector and general values apply to both. Shot weight is stated for PS. Where two values are separated by a slash, the source states them jointly for two machine sizes (165 / 180).

WILL YOUR MOULD FIT?

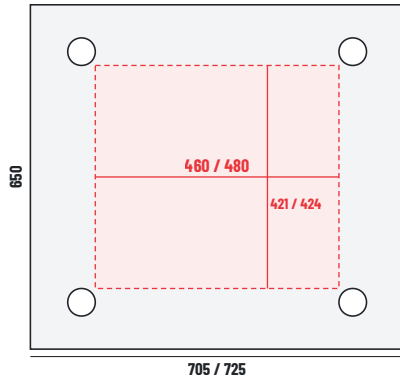

Platen schematic in mm. Tie-bar diameter is not shown; drawing not to scale.

SPACE BETN. TIE BARS H X V
460 X 421 / 480 X 424 mm

PLATEN SIZE
705 X 650 / 725 X 650 mm

MOULD THICKNESS
200 - 525 mm

MOULD CLAMPING STROKE
375 mm

MAX. DAY LIGHT OPENING
900 mm

EJECTOR STROKE
110 mm

MOULD AND PART FIT WORKSHEET

Fill in your values before an enquiry. Discuss anything close to a limit with us.

CHECK	PET-180 LIMIT	WHAT TO CONFIRM	YOUR MOULD OR PART	OK
Mould width, height	460 X 421 / 480 X 424 mm	Fits between tie bars for loading		
Mould plate size	705 X 650 / 725 X 650 mm platen	Mould clamps fit on the platen		
Mould thickness (closed)	200 - 525 mm	Closed mould height in range		
Opening for removal	375 stroke, 900 day light mm	Part and runner clear when open		
Ejection	110 mm, 7.5 Tons	Travel and force the mould needs		
Shot (parts + runner)	249 (A) / 315 (B) gms PS	Other materials: Calculation Guide		
Injection pressure	2250 (A) / 1778 (B) Kg/cm ²	Pressure the part needs		
Clamping force	165 / 180 Tons	From projected area: Calculation Guide		

CHOOSING BETWEEN THE SCREW OPTIONS

SCREW OPTION	A · 40 MM	B · 45 MM
Max. Swept Volume Cub.cm	276	350
Max. Shot Weight (PS) gms	249	315
Max. Injection Pressure Kg/cm ²	2250	1778
Rate Of Injection cc/sec	111	140
Screw L/D Ratio	20:1	18:1

The smaller screw gives higher injection pressure and a smaller shot. The larger screw gives a larger shot and a higher rate of injection at lower pressure.

INSTALLATION AND UTILITIES

ITEM	UNIT	VALUE
Total connected load	KW	31.8
Heating capacity	KW	12.5
Servo motor	KW	19.3
Tank capacity (oil fill)	Ltrs	410
Machine weight	Tons	5.6
Floor space (L X W X H)	Mtr.	4.9 X 1.5 X 2

SITE CHECKS BEFORE INSTALLATION

- ☐ Power supply for the connected load
 ☐ Cooling water for oil cooler and mould
 ☐ Lifting for unloading and mould changes
- ☐ Hydraulic oil for the first tank fill
 ☐ Foundation for the machine weight
 ☐ Space for robot, conveyor and dryer

Confirm these details with Pratishna Engineers before delivery.

READING THIS SPECIFICATION SHEET

TERM	WHAT IT MEANS
Screw diameter	Injection screw size. A smaller screw gives more pressure, a smaller shot.
Screw L/D ratio	Flighted length over diameter. Affects melting and mixing.
Swept volume	Screw area times injection stroke: largest melt volume per shot.
Shot weight (PS)	Swept volume as a weight of PS. Other materials differ.
Injection pressure	Highest melt pressure the injection unit can apply.
Rate of injection	Melt volume per second. Matters for thin walls and long flows.
Screw speed · nozzle force	Max. screw rotation in recovery · force of nozzle on sprue bush.

TERM	WHAT IT MEANS
Mould clamping force	Force keeping the mould closed against injection pressure.
Clamping stroke	Opening travel of the moving platen.
Mould thickness	Range of closed mould heights the clamp accepts.
Max. day light	Largest gap between fixed and moving platens.
Space betn. tie bars	Clear gap between tie bars. Limits mould size.
Servo motor · heating	Rated servo motor power · barrel and nozzle heater power.
Total connected load	For power supply planning: servo motor plus heating.

OTHER MODELS IN THE PET SERIES

MODEL	PET-75	PET-100	PET-125	PET-150	PET-180	PET-220	PET-260
Mould clamping force (Tons)	75	100	120	140	165 / 180	225	250
Max. shot weight PS (gms)	82 to 116	126 to 151	151 to 178	186 to 243	249 to 315	513 to 610	661 to 776

Shot weight ranges cover the screw options of each model. Click a model for its page.

WHAT TO SEND FOR A MACHINE RECOMMENDATION

- ☐ Part drawing (2D and 3D CAD)
- ☐ Material and grade
- ☐ Part weight and runner weight
- ☐ Projected area of parts and runner
- ☐ Wall thickness and flow length
- ☐ Number of cavities
- ☐ Mould size (W X H X thickness) and weight
- ☐ Hot runner, core pulls or unscrewing
- ☐ Target cycle time and monthly volume
- ☐ Automation: robot, conveyor, dryer

PRATISHNA ENGINEERS

Mumbai-based injection moulding machine manufacturer with in-house design, manufacturing, assembly, testing and service, supplying India and international markets.

35+

 YEARS OF
EXPERIENCE

9,000+

 MACHINES
SUPPLIED

1,000+

CUSTOMERS

In-house

 DESIGN TO
SERVICE

RELATED RESOURCES

PET INJECTION MOULDING MACHINE BROCHURE

<https://pratishnaengineers.com/resources/pet-injection-moulding-machine-brochure/>

CLAMPING FORCE & SHOT-SIZE CALCULATION GUIDE

<https://pratishnaengineers.com/resources/clamping-force-and-shot-size-calculation-guide/>

SEND YOUR PART AND MOULD DETAILS FOR A MACHINE RECOMMENDATION

enquiry@pratishnaengineers.com · +91-22-66970281 / 82 · www.pratishnaengineers.com

A1-4, Vaibhav Ind. Premises, Opp. Oxford Chambers, Saki Vihar Road, Andheri (E), Mumbai 400 072, India

SPECIFICATION NOTE

Specifications are indicative and are based on Pratishna Engineers' standard machine configuration at the date of issue. Values may change with screw, barrel, mould and optional equipment choices, and are subject to change without notice as part of continuous product development. Shot weight is stated for polystyrene (PS). This sheet does not constitute a quotation, warranty or contractual commitment. Final specifications are confirmed only in Pratishna Engineers' written quotation and order acknowledgement.